


## JJ-3052M-SS (A 2277)

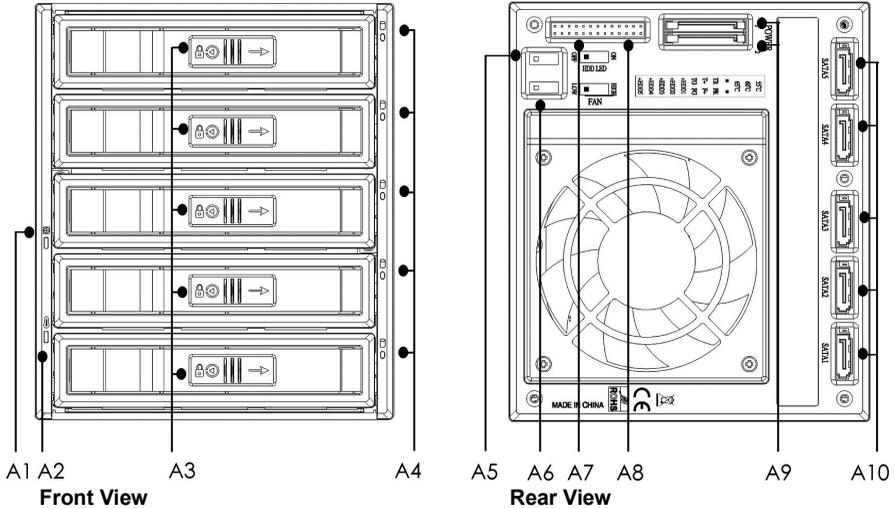

- A1 = FAN status LED  
(Normal : Green Failed : Red)
- A2 = Temperature status LED  
(Normal : Green Failed : Red)
- A3 = Triangle Safety lock
- A4 = HDD power & access LED
- A5 = HDD LED Switch (enable/disable)

- A6 = FAN Speed switch  
High (3000rpm)/Low (2400rpm)
- A7 = External signal jumper
- A8 = Temperature setting jumper  
(55°C/60°C/65°C)
- A9 = 15pin Power connector x 2
- A10 = SATA data signal connector x 5

| LED   | A4     |            |             |
|-------|--------|------------|-------------|
| State | HDD in | HDD Access | A5 turn OFF |
| Color | Green  | Orange     | Green       |
| Blink | x      | o          | x           |

\*When A5 switch is turned to OFF position, the HDD accessing function is disabled. In this case, the front accessing LED is displayed in solid green for the "power ON" function only.



- **Material: Aluminum Frame & bezel**
- **With aluminum HDD tray**
- **Interface: Support SATA-I, II, III & SAS I, II**
- **Transfer rate: Up to 6Gbps**
- **Connector: 15pin SATA-power connector x 2 & 7pin data signal connector x 5**

- 
- **Black aluminum-body with Black panel**
  - **Sides sliding rails with vibration reducing springs**
  - **Triangle metal key-lock safeguards the hard disk in the correct position preventing it bouncing out while HDD is in operation.**
  - **Support SATA and SAS primary channel**
  - **Hot swap in / out**
  - **3 \* 5.25 Bay for 5 \* 3.5" (or 2.5") SATA or SAS Hard drives**
  - **HDD LED functioning ON/OFF Switch**
  - **Switch for cooling fan (High or Low speed)**

- 
- **Dim: 211(L) \* 146(W) \* 126(H) mm**
  - **Weight: 2.08 kgs**
  - **Color: black**
  - **Fan: 8cm FAN x 1**