



## ST-2335TL

(A 2156)

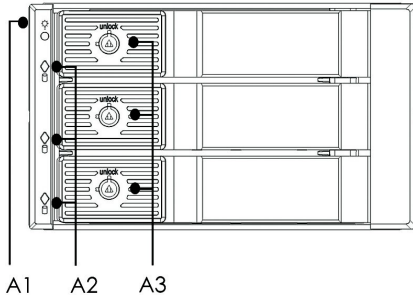

**Front View**

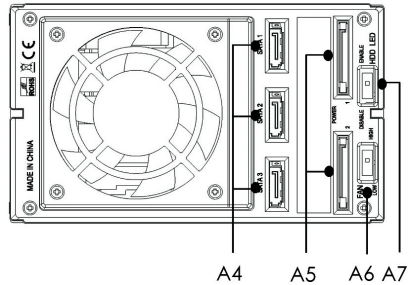

**Rear View**

- A1 = Power LED
- A2 = HDD power / access LED
- A3 = Triangle Safety lock
- A4 = 7pin signal data connector x 3

- A5 = 15pin SATA power connector x 2
- A6 = FAN Speed switch  
High (3000rpm)/Low (2400rpm)
- A7 = HDD LED Switch (enable/disable)

LED	A2		
State	HDD in	HDD Access	A7 turn OFF
Color	Blue	Purple	Blue
Blink	x	o	x

\* When A7 switch is turned to OFF position, the HDD accessing function is disabled. In this case, the front LED is displayed in solid blue for the "power ON" function only.

\* A1 LED is shown BLUE when the power is on.



- **Material:** Aluminum Frame & bezel
  - **Interface:** Support SATA-I, II, III & SAS I, II
  - **Transfer rate:** Upto 6Gbps
  - **Connector:** 15pin SATA power connector x 2 & 7pin data signal connector x 3
- 

- **Black aluminum-body with Black panel**
  - **Trayless Design**
  - **Triangle metal key-lock safeguards the hard disk in the correct position preventing it from bouncing out while HDD is in operation.**
  - **Hot swap in / out**
  - **2\*5.25Bay for 3\*3.5" SATA or SAS Hard drives**
  - **HDD LED functioning ON/OFF Switch**
  - **Switch for cooling fan (High or Low speed)**
- 

- **Dim:** 195(L) \* 146(W) \* 84.5(H) mm
- **Weight:** 1.02 kg
- **Color:** black
- **Fan:** 7cm FAN x 1