



## JJ-3142M-SS

(A 2276)

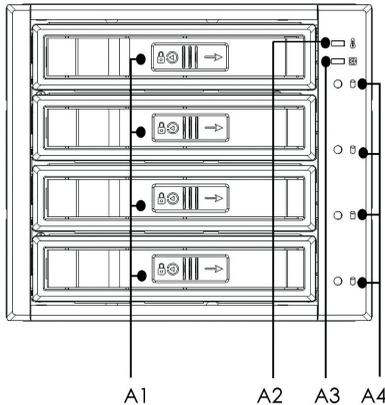

**Front View**

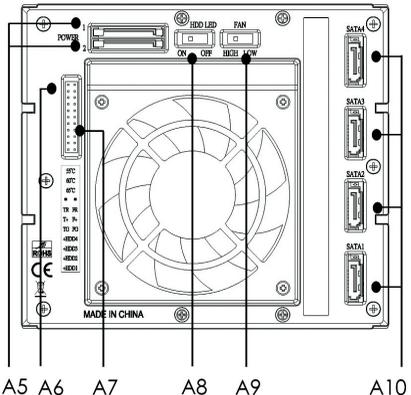

**Rear View**

- A1 = Triangle Safety lock
- A2 = Temperature status LED  
(Normal : Green Failed : Red)
- A3 = FAN status LED  
(Normal : Green Failed : Red)
- A4 = HDD power & access LED
- A5 = 15pin power connector x 2

- A6 = Temperature setting  
(55°C/60°C/65°C)
- A7 = Extension signal jumper
- A8 = HDD LED Switch (enable/disable)
- A9 = FAN Speed switch  
High (3000rpm)/Low (2400rpm)
- A10 = SATA data signal connector x 4

LED	A4		
State	HDD in	HDD Access	A8 turn OFF
Color	Green	Orange	Green
Blink	x	o	x

\* When A8 switch is turned to OFF position, the HDD accessing function is disabled. In this case, the front accessing LED is displayed in solid green, for the "power ON" function only.



- **Material:** Aluminum Frame & bezel
- **With** aluminum HDD tray
- **Interface:** Support SATA-I, II, III & SAS I, II
- **Transfer rate:** Up to 6Gbps
- **Connector:** 15pin SATA-power connector x 2 & 7pin data signal connectors x 4

- 
- **Black** aluminum-body with **Black** panel
  - **Sides** sliding rails with vibration reducing springs
  - **Triangle** metal key-lock safeguards the hard disk in the correct position preventing it from bouncing out while HDD is in operation.
  - **Support** SATA and SAS primary channel
  - **Hot** swap in / out
  - **3 \* 5.25** Bay for **4 \* 3.5"** ( or **2.5"**) SATA or SAS Hard drives
  - **HDD** LED functioning **ON/OFF** Switch
  - **Switch** for cooling fan(High or Low speed)

- 
- **Dim:** 211(L) \* 146(W) \* 126(H) mm
  - **Weight:** 2.06 kgs
  - **Color:** black
  - **Fan:** 8cm FAN X1