
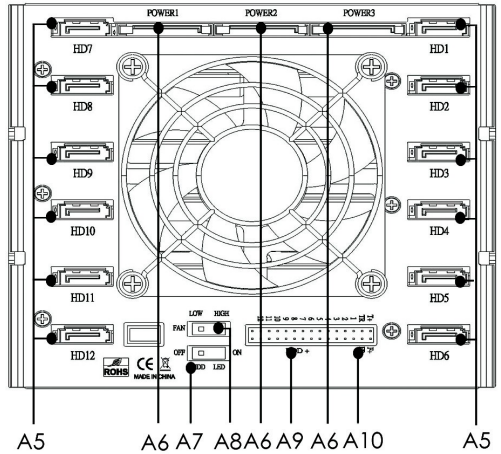


JJ-1012M

(A 2369)

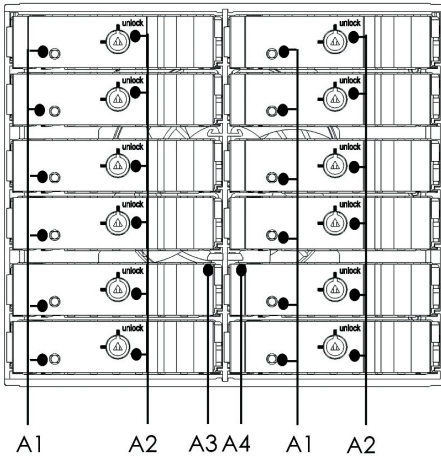

- A1 = HDD power & access LED
- A2 = Triangle Safety lock
- A3 = FAN status LED
Solid red for FAN failure
- A4 = Temperature status LED
Solid red for Overheating
- A5 = SATA data signal connector x 12

- A6 = 15pin power connector x 3
- A7 = HDD LED Switch (ON/OFF)
- A8 = FAN Speed switch
High (3000rpm)/Low (2400rpm)
- A9 = HDD extension signal jumper
- A10 = Extension signal jumper for
Temperature & fan

LED	A1			A3	A4
State	HDD in	HDD Access	A7 turn OFF	Fan failure	Overheating
Color	Blue	Purple	Blue	Red	Red
Blink	x	o	x	x	x

* When A7 switch is turned to OFF position, the HDD accessing function is disabled. In this case, the front accessing LED is displayed in solid blue for the power ON function only.

- **Material:** Aluminum Frame & bezel
- **Interface:** Support SATA-I, II, III & SAS I, II
- **Transfer rate:** Up to 6Gbps
- **Connector:** 15pin SATA-power connector x 3 & 7pin data signal connector x 12

-
- **Black aluminum-body with Black panel**
 - **Sides sliding rails with vibration reducing springs**
 - **Triangle metal key-lock safeguards the hard disk in the correct position preventing it bouncing out while HDD is in operation.**
 - **Support SATA and SAS primary channel**
 - **Hot swap in / out**
 - **3 * 5.25 Bay for 12 * 2.5" SATA or SAS Hard drives (HDD height up to 15mm)**
 - **HDD LED functioning ON/OFF Switch**
 - **Switch for cooling fan (High or Low speed)**

-
- **Color:** black
 - **Fan:** 8cm x 1
 - **Dim:** 164 * 146 * 127.5 mm
 - **Weight:** 1.82 kgs

Note: Don't tilt the tray when inserting it!!

